



# KSG-DM SERIES

- KSG-3.2K-DM
- KSG-3.6K-DM
- KSG-4K-DM
- KSG-4.6K-DM
- KSG-5K-DM




## Design

- Max PV Voltage up to 500V
- Double MPPT
- High efficiency up to 97.5%
- Smaller and Lighter
- IP65 protection
- Easy installation
- Reactive power controller
- Digital controller


## Certification

- TUV
- CE
- VDE 0126
- EN 50438
- PE/MEA
- IEC 62109
- IEC 61000
- IEC 61727
- IEC 61683
- IEC 62116

## Circuit diagram

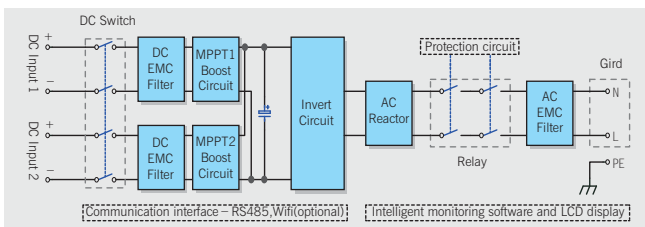

## Efficiency curve

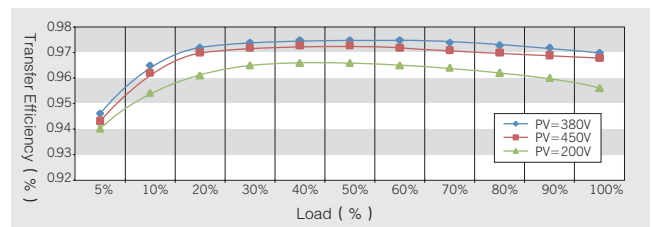

## KSG-DM Series Technical Specifications

Model	KSG-3.2K-DM	KSG-3.6K-DM	KSG-4K-DM	KSG-4.6K-DM	KSG-5.0K-DM
<b>Input(DC)</b>					
Max. DC power	4160W	4680W	5200W	5980W	6500W
Max. DC voltage / Nominal DC voltage	500Vdc / 380Vdc				
MPPT voltage range	100~490Vdc				
Min. / start DC voltage	120 / 150Vdc				
Full load MPPT voltage range	150~400Vdc	145~400Vdc	165~400Vdc	200~400Vdc	
Number of MPPT trackers	2				
Strings per MPPT tracker	1				
Max. DC power per MPPT tracker	1800W	2200W	2500W	3000W	
Max. input current per MPPT tracker	11A / 11A	13A / 13A			
<b>Output (AC)</b>					
Max. AC output Power	3000W	3680W	4000W	4600W	5000W
Nominal AC voltage	230Vac				
AC voltage range	230Vac±20%				
Nominal AC grid frequency	50 / 60Hz				
AC grid frequency range	50 / 60Hz(±5Hz)				
Max. output current	14A	16A	17.5A	20A	22A
Power factor (cosΦ)	Lagging0.9~leading 0.9				
THDI	<3%				
AC connection	LN+PE				
Topology	Transformer-less				
<b>Efficiency</b>					
Max. efficiency	97.5%				
Euro efficiency	97%				
MPPT efficiency	99.90%				
Consumption: standby / night	<5W / <0.2W				
<b>Protection devices</b>					
AC leakage current fault protection	Yes				
Ground fault protection	Yes				
Anti-islanding protection	Yes				
DC overvoltage protection	Yes				
DC surge protection	Yes				
AC surge protection	Yes				
DC reverse-polarity protection	Yes				
<b>Physical</b>					
Dimensions (W×L×D) in mm	329×466×149				
Weight	14.5Kg	14.9Kg		15.5Kg	
<b>Environment</b>					
Operating temperature range	-25°C~+60°C				
Noise emission (typical)	≤ 25dB				
Cooling type	Nature cooling				
Protection rating	IP65				
<b>Features</b>					
LCD display	Yes				
Interfaces	RS485				
Optional	DC Switch / WiFi Plug / GPRS Plug				

Specifications subject to change without prior notice.

# KSTAR

— Stock code: 002518 —

### HEADQUARTERS

Add: 4/F, No.1 Bldg. Software Park, Keji C. Rd. 2nd, Hi-Tech Industrial Zone, Shenzhen 518057, P.R.China

Kstar reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on kstar products previously or subsequently sold. Kstar does not guarantee the items of the accuracy and completeness.

Version number: KSD/S 2017-07